



GRUS DSNG CASE FLY AWAY SYSTEM - Grusat1200L

OVERVIEW

Broadcasting during disasters such as tornadoes, hurricanes, flooding or heavy snow can be critical. And even in normal times, the budget for devices and shipping is sometimes limited. Grusat1200L makes sure that there are no delays in your broadcasting. It is a Single Case Fly Away Satellite News Gathering system, highly portable and cost effective.




FEATURES

- Highly integrated in a single case
- 28kg, completely portable
- Easy to deploy
- Ku band
- Over 5Mbps data rate
- Automatic starting, positioning and satellite acquisition in less than 5 minutes
- Manual operation in case of unusual situation
- User-friendly interface
- Designed to pass many military standards, excellent performance in the harshest environments


SYSTEM CONTENTS

Grusat1200L includes absolutely everything you need to broadcast live!


Antenna & control system

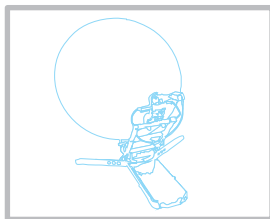


Encoder

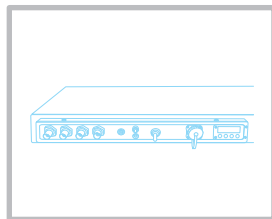


Modulator

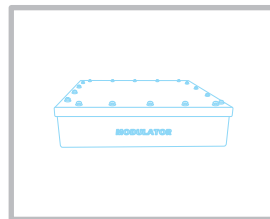

Accessories

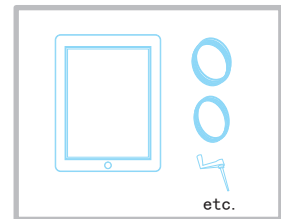

WORKFLOW

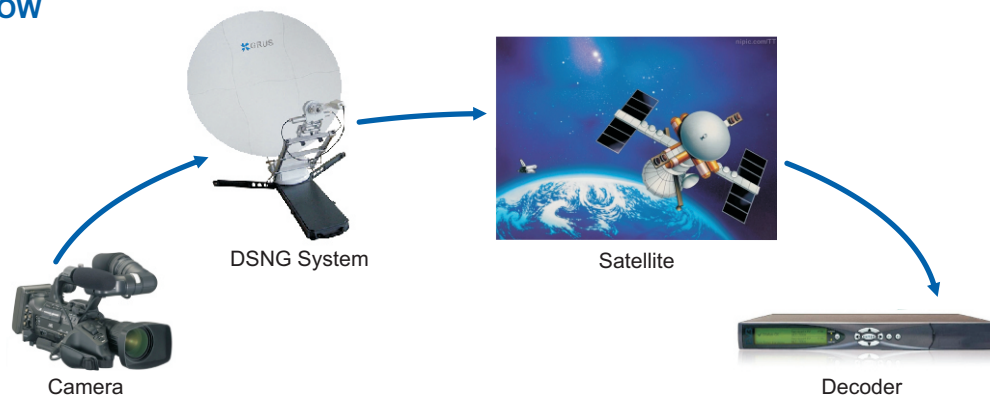



SPECIFICATIONS

Technical parameters	Antenna System																								
<table border="1"> <thead> <tr> <th colspan="2">Reflector</th> </tr> </thead> <tbody> <tr> <td>Shape</td> <td>Hexapetalous paraboloid</td> </tr> <tr> <td>Material</td> <td>Carbon-fiber</td> </tr> <tr> <td>Diameter</td> <td>1.2m</td> </tr> <tr> <td>Base Structure</td> <td>Az/EI/Pol 3-axis rotary</td> </tr> <tr> <td>Polarization</td> <td>Motor drive</td> </tr> </tbody> </table>	Reflector		Shape	Hexapetalous paraboloid	Material	Carbon-fiber	Diameter	1.2m	Base Structure	Az/EI/Pol 3-axis rotary	Polarization	Motor drive	<table border="1"> <thead> <tr> <th colspan="2">Scanning Range</th> </tr> </thead> <tbody> <tr> <td>Azimuth</td> <td>±120°</td> </tr> <tr> <td>Elevation</td> <td>0°to+90°</td> </tr> <tr> <td>Polarization</td> <td>±90°</td> </tr> </tbody> </table>	Scanning Range		Azimuth	±120°	Elevation	0°to+90°	Polarization	±90°				
Reflector																									
Shape	Hexapetalous paraboloid																								
Material	Carbon-fiber																								
Diameter	1.2m																								
Base Structure	Az/EI/Pol 3-axis rotary																								
Polarization	Motor drive																								
Scanning Range																									
Azimuth	±120°																								
Elevation	0°to+90°																								
Polarization	±90°																								
<table border="1"> <thead> <tr> <th colspan="2">Operation Mode</th> </tr> </thead> <tbody> <tr> <td>Auto Mode</td> <td>One-button auto satellite acquisition</td> </tr> <tr> <td>Semiautomatic Mode</td> <td>Acquisition step-by-step through the control system</td> </tr> <tr> <td>Manual Mode</td> <td>Manually deploy, acquire and stow in case of unusual situation</td> </tr> </tbody> </table>	Operation Mode		Auto Mode	One-button auto satellite acquisition	Semiautomatic Mode	Acquisition step-by-step through the control system	Manual Mode	Manually deploy, acquire and stow in case of unusual situation	<table border="1"> <thead> <tr> <th colspan="2">Electrical Interface</th> </tr> </thead> <tbody> <tr> <td>Feed Interface</td> <td>N-type coaxial cable</td> </tr> <tr> <td>Control Interface</td> <td>Waterproof aviation plug Standard IP55</td> </tr> <tr> <td>Power Supply</td> <td>Waterproof aviation plug 50 Hz, 220V Standard IP55</td> </tr> <tr> <td>Power Consumption</td> <td><100 W</td> </tr> </tbody> </table>	Electrical Interface		Feed Interface	N-type coaxial cable	Control Interface	Waterproof aviation plug Standard IP55	Power Supply	Waterproof aviation plug 50 Hz, 220V Standard IP55	Power Consumption	<100 W						
Operation Mode																									
Auto Mode	One-button auto satellite acquisition																								
Semiautomatic Mode	Acquisition step-by-step through the control system																								
Manual Mode	Manually deploy, acquire and stow in case of unusual situation																								
Electrical Interface																									
Feed Interface	N-type coaxial cable																								
Control Interface	Waterproof aviation plug Standard IP55																								
Power Supply	Waterproof aviation plug 50 Hz, 220V Standard IP55																								
Power Consumption	<100 W																								
<table border="1"> <thead> <tr> <th colspan="2">Control Mode</th> </tr> </thead> <tbody> <tr> <td>Intelligent Terminal</td> <td>Serial control/Wireless control</td> </tr> </tbody> </table>	Control Mode		Intelligent Terminal	Serial control/Wireless control	<table border="1"> <thead> <tr> <th colspan="2">RF</th> </tr> </thead> <tbody> <tr> <td>Frequency</td> <td>Tx 13.75Ghz to 14.50 Ghz Rx 10.95Ghz to 12.75Ghz</td> </tr> <tr> <td>Gain</td> <td>Tx ≥ 43. 5+20lg(f(GHz)/14.25)dBi Rx ≥ 42+20lg(f(GHz)/12.5)dBi</td> </tr> <tr> <td>3dB Beam Width</td> <td>Rx 1.35° Tx 1.26°</td> </tr> <tr> <td>Polorization Mode</td> <td>Linear</td> </tr> <tr> <td>Cross-Polarization</td> <td>> 35 dB</td> </tr> <tr> <td>Tx/Rx Isolation</td> <td>> 80 dB (including Tx/Rx filters)</td> </tr> <tr> <td>Power Capacity</td> <td>0.5 kW/port</td> </tr> <tr> <td>VSWR</td> <td>1.25:1</td> </tr> </tbody> </table>	RF		Frequency	Tx 13.75Ghz to 14.50 Ghz Rx 10.95Ghz to 12.75Ghz	Gain	Tx ≥ 43. 5+20lg(f(GHz)/14.25)dBi Rx ≥ 42+20lg(f(GHz)/12.5)dBi	3dB Beam Width	Rx 1.35° Tx 1.26°	Polorization Mode	Linear	Cross-Polarization	> 35 dB	Tx/Rx Isolation	> 80 dB (including Tx/Rx filters)	Power Capacity	0.5 kW/port	VSWR	1.25:1		
Control Mode																									
Intelligent Terminal	Serial control/Wireless control																								
RF																									
Frequency	Tx 13.75Ghz to 14.50 Ghz Rx 10.95Ghz to 12.75Ghz																								
Gain	Tx ≥ 43. 5+20lg(f(GHz)/14.25)dBi Rx ≥ 42+20lg(f(GHz)/12.5)dBi																								
3dB Beam Width	Rx 1.35° Tx 1.26°																								
Polorization Mode	Linear																								
Cross-Polarization	> 35 dB																								
Tx/Rx Isolation	> 80 dB (including Tx/Rx filters)																								
Power Capacity	0.5 kW/port																								
VSWR	1.25:1																								
<table border="1"> <thead> <tr> <th colspan="2">Tracking Mode</th> </tr> </thead> <tbody> <tr> <td>Auto Mode</td> <td>Beacon receiver+servo driving system+control management system</td> </tr> <tr> <td>Acquiring Time</td> <td>≤ 3 minutes</td> </tr> </tbody> </table>	Tracking Mode		Auto Mode	Beacon receiver+servo driving system+control management system	Acquiring Time	≤ 3 minutes	<table border="1"> <thead> <tr> <th colspan="2">Coding/Modulation System</th> </tr> </thead> <tbody> <tr> <td>Coding Format</td> <td>H.264</td> </tr> <tr> <td>Video Input</td> <td>SDI 1280x720p 50 Hz 920x1080i 50 Hz 720x576 PAL 50 Hz</td> </tr> <tr> <td>Analog Audio Input</td> <td>CVBS/PAL/BNC connector</td> </tr> <tr> <td>Audio Input</td> <td>Balanced audio</td> </tr> </tbody> </table>	Coding/Modulation System		Coding Format	H.264	Video Input	SDI 1280x720p 50 Hz 920x1080i 50 Hz 720x576 PAL 50 Hz	Analog Audio Input	CVBS/PAL/BNC connector	Audio Input	Balanced audio								
Tracking Mode																									
Auto Mode	Beacon receiver+servo driving system+control management system																								
Acquiring Time	≤ 3 minutes																								
Coding/Modulation System																									
Coding Format	H.264																								
Video Input	SDI 1280x720p 50 Hz 920x1080i 50 Hz 720x576 PAL 50 Hz																								
Analog Audio Input	CVBS/PAL/BNC connector																								
Audio Input	Balanced audio																								
<table border="1"> <thead> <tr> <th colspan="2">Case Crafts</th> </tr> </thead> <tbody> <tr> <td>Material</td> <td>Air box</td> </tr> <tr> <td>Quake-Proof</td> <td>Design for military use, meet all transportation requirements</td> </tr> <tr> <td>Water-Proof</td> <td>Full sealed for water proof</td> </tr> <tr> <td>Case Dimension</td> <td>114×64.3×41.9 cm</td> </tr> <tr> <td>Weight</td> <td>≤ 28kg</td> </tr> <tr> <td>Transportation Mode</td> <td>Meet all transportation requirements, by highway, railway, ship, air, etc.</td> </tr> </tbody> </table>	Case Crafts		Material	Air box	Quake-Proof	Design for military use, meet all transportation requirements	Water-Proof	Full sealed for water proof	Case Dimension	114×64.3×41.9 cm	Weight	≤ 28kg	Transportation Mode	Meet all transportation requirements, by highway, railway, ship, air, etc.	<table border="1"> <thead> <tr> <th colspan="2">Control/Monitor</th> </tr> </thead> <tbody> <tr> <td>Remote Control</td> <td>Wireless control terminal : pad/laptop</td> </tr> <tr> <td>Local Control</td> <td>LCD panel with buttons</td> </tr> <tr> <td>Monitor Interface</td> <td>SMA output</td> </tr> </tbody> </table>	Control/Monitor		Remote Control	Wireless control terminal : pad/laptop	Local Control	LCD panel with buttons	Monitor Interface	SMA output		
Case Crafts																									
Material	Air box																								
Quake-Proof	Design for military use, meet all transportation requirements																								
Water-Proof	Full sealed for water proof																								
Case Dimension	114×64.3×41.9 cm																								
Weight	≤ 28kg																								
Transportation Mode	Meet all transportation requirements, by highway, railway, ship, air, etc.																								
Control/Monitor																									
Remote Control	Wireless control terminal : pad/laptop																								
Local Control	LCD panel with buttons																								
Monitor Interface	SMA output																								
<table border="1"> <thead> <tr> <th colspan="2">Environment parameters</th> </tr> </thead> <tbody> <tr> <td>Working Temperature</td> <td>-30 °C to +55 °C</td> </tr> <tr> <td>Storage Temperature</td> <td>-55 °C to +85 °C</td> </tr> <tr> <td>Humidity</td> <td>≤ 95%</td> </tr> <tr> <td>Wind Speed</td> <td>For working: ≤ 20m/s For survival: ≤ 55m/s</td> </tr> <tr> <td>Protection Degree</td> <td>Ip55</td> </tr> </tbody> </table>	Environment parameters		Working Temperature	-30 °C to +55 °C	Storage Temperature	-55 °C to +85 °C	Humidity	≤ 95%	Wind Speed	For working: ≤ 20m/s For survival: ≤ 55m/s	Protection Degree	Ip55	<table border="1"> <thead> <tr> <th colspan="2">Modulation & RF</th> </tr> </thead> <tbody> <tr> <td>Modulation Mode</td> <td>DVB-S/S2 QPSK/8PSK/16APSK/32APSK</td> </tr> <tr> <td>Symbol Rate</td> <td>5~30 M</td> </tr> <tr> <td>Output Interface</td> <td>From power amplification connected directly with the modulation plate</td> </tr> <tr> <td>Power Amplification</td> <td>Ku band 30~80W solid-state power amplification</td> </tr> <tr> <td>Power Consumption</td> <td><100 W</td> </tr> </tbody> </table>	Modulation & RF		Modulation Mode	DVB-S/S2 QPSK/8PSK/16APSK/32APSK	Symbol Rate	5~30 M	Output Interface	From power amplification connected directly with the modulation plate	Power Amplification	Ku band 30~80W solid-state power amplification	Power Consumption	<100 W
Environment parameters																									
Working Temperature	-30 °C to +55 °C																								
Storage Temperature	-55 °C to +85 °C																								
Humidity	≤ 95%																								
Wind Speed	For working: ≤ 20m/s For survival: ≤ 55m/s																								
Protection Degree	Ip55																								
Modulation & RF																									
Modulation Mode	DVB-S/S2 QPSK/8PSK/16APSK/32APSK																								
Symbol Rate	5~30 M																								
Output Interface	From power amplification connected directly with the modulation plate																								
Power Amplification	Ku band 30~80W solid-state power amplification																								
Power Consumption	<100 W																								

Contact us

 info@grus.hk

 For Sales Inquiries
sales@grus.hk

 For Technical Support
support@grus.hk

 For Partnership Inquiries
info@grus.hk